

Shy AAP!

Work Order ID 84872

84872

Page 1

May-29-12 7:17:15 AM

Item ID: D3684-041

Accept

N900040100

Setup Start *NS1*

Revision ID:

Stop *NS2*

Item Name: TRIPOD MOUNT ASSEMBLY

Start Date: 5/29/12 Start Qty: 1.00

1

Cust Item ID:

Required Date: 5/30/12 Req'd Qty: 1.00

1

Customer:

Reference:

Approvals:

Process Plan: 

Date: _____

Tooling: _____

Date: _____

Run Start *NR1*

QC: _____

Date: _____

SPC (Y/N): _____

Date: _____

Stop *NR2*

Sequence ID/
Work Center ID

Operation
Description

Set Up/
Run Hours

Tool ID

Tool #

Plan
Code

Accept
Qty

Reject
Qty

Reject
Number

Insp.
Stamp

Draw Nbr

Revision Nbr

D3684

Rev D

100

Pick Kit

0.00


100

Packaging

Memo

0.00

Packaging

12/5/29 

110

QC4- 100% Inspect kits for completeness

0.00


110

QC

Memo

0.00

Quality Control

8/2/29 

120

Identify as per dwg & Stock Location: _____

0.00



120

Packaging

Memo

0.00

Packaging

 5/25/29 

Work Order ID 84872

May-29-12 7:17:15 AM

84872

Page 2

Item ID: D3684-041

Accept

N900040100Setup Start ***NS1***

Revision ID:

Stop ***NS2***

Item Name: TRIPOD MOUNT ASSEMBLY

Start Date: 5/29/12 Start Qty: 1.00

1

Cust Item ID:

Required Date: 5/30/12 Req'd Qty: 1.00

1

Customer:

Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____

Run Start ***NR1***

QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Stop ***NR2***Sequence ID/
Work Center IDOperation
DescriptionSet Up/
Run Hours

Tool ID

Tool #

Plan
CodeAccept
QtyReject
QtyReject
NumberInsp.
Stamp

130

QC21- Final Inspection - Work Order Release

0.00

130

QC

Memo

0.00

Quality Control

MLJ 12105/29

MF
12-05-29

Picklist Print

May-29-12 7:17:14 AM

Page 1

Work Order ID: 84872

Parent Item: D3684-041

Parent Item Name: TRIPOD MOUNT ASSEMBLY

Start Date: 5/29/12

Required Date: 5/30/12

Start Qty: 1.00

Required Qty: 1.00

Comments: IPP Rev:A new issue 08-02-12 DD verified by:LL
 IPP Rev:B As per Rev B 09-01-07 JLM Verified By:EC
 03-16 JLM VERIFIED BY:EC
 IPP Rev:C Added sealant note as per Rev C 09-01-20 JLM Verified By:DD
 IPP REV:C AS PER REV D 10-

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
---------------------------------	------------------------	---------------	-------------	---------------------	------------------	-----------------	--------------------	----------------	-------------	--------------	---------------	----------------	--------

AN3C12A Bolts		Purchased	No			110	Each	249.0000	2	2			
------------------	--	-----------	----	--	--	-----	------	----------	---	---	--	--	--

Location	Loc Qty	Loc Code
GA	40	
120449	40	
ST351	209	
117514	4	
118112	5	
118451	22	
119510	1	
120423	77	
121584	50	
121689	50	

D3684-043 MOUNT ASSEMBLY		Manufactured	No			110	Each	2.0000	1	1			
-----------------------------	--	--------------	----	--	--	-----	------	--------	---	---	--	--	--

Location	Loc Qty	Loc Code
st200	2	
75195	2	

D3684-045 LEG ASSEMBLY		Manufactured	No			110	Each	0.0000	1	1			
---------------------------	--	--------------	----	--	--	-----	------	--------	---	---	--	--	--

D3692-1 SPACER		Manufactured	No			110	Each	437.0000	4				
-------------------	--	--------------	----	--	--	-----	------	----------	---	--	--	--	--

Location	Loc Qty	Loc Code
ST061	437	
51467	16	
80364	21	
81729	100	
81961	200	
83257	100	

Picklist Print

May-29-12 7:17:14 AM

Page 2

Work Order ID: 84872

Parent Item: D3684-041

Parent Item Name: TRIPOD MOUNT ASSEMBLY

Start Date: 5/29/12

Required Date: 5/30/12

Start Qty: 1.00

Required Qty: 1.00

MS21043-3 Purchased No

110 Each 1,655.0000 2

12/3/12

Nut

Location


Loc Qty

Loc Code

FG	72	
103691	72	
GA	30	
120693	30	
ST301	1553	
118077	2	
118614	51	
118686	30	
119758	20	
121255	450	
121708	1000	

2


ITEM	QTY -041	PART NUMBER	DESCRIPTION
1	X	D3684-041	TRIPOD MOUNT ASSEMBLY
2	1	D3684-043	MOUNT ASSEMBLY
3	1	D3684-045	INBOARD LEG ASSEMBLY
4	4	D3692-1	SPACER
5	2	AN3C-12A	BOLT
6	2	MS21043-3	NUT

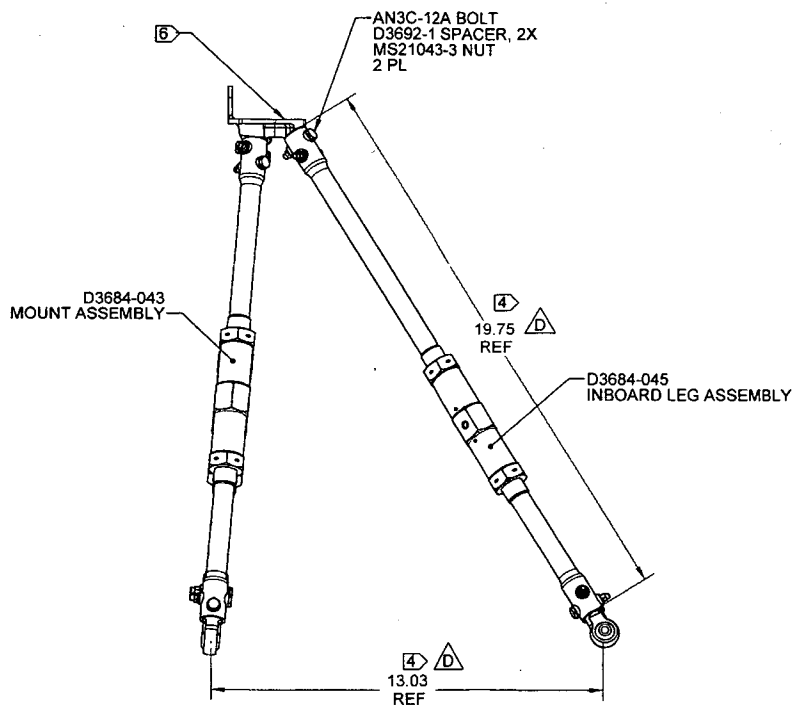

D3684-041 TRIPOD MOUNT ASSY ⑦

NOTES:


- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/-3/-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 9.9 lbs
- 6) ASSEMBLE D3684-045 WITH D3684-043 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT
- 7) ASSEMBLY SHOWN FOR REF ONLY, -041 IS PACKAGED UNASSEMBLED

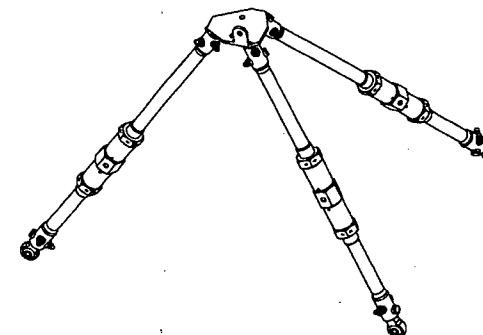

RELEASED
2010-03-15

D	13.03 WAS 13.10 (ZN B5-1); 19.75 WAS 19.87 (ZN C4-1); 19.40 WAS 19.52 (ZN C6-2); 17.15 WAS 17.27 (ZN C4-2); 19.85 WAS 20.24 (ZN B5-2); 20.96 WAS 21.09 (ZN C5-3); 20.62 WAS 20.74 (ZN C5-4); 18.37 WAS 18.49 (ZN C6-5)	RF	10.03.03
C	NOW ASSEMBLED USING SEALANT (ZN A8-1, D6-1, A8-2, D4-2, A8-3, B4-3, A8-4, B4-4, A8-5, B5-5); ASSEMBLY NOW SHOWN FOR REF ONLY (ZN A8-1, A4-1)	RF	08.12.15
B	19.52 WAS 19.50 (ZN C6-2); 9.20 WAS 9.70 (ZN C6-2); 20.74 WAS 21.24 (ZN C5-4); 6.95 WAS 6.88 (ZN D5-5); MODIFIED PER PROTOTYPE INSTALLATION; REFORMATTED TO CURRENT DWG STANDARDS	RF	08.11.24
A	NEW ISSUE	RF	08.05.22
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA DRAWING NO. D3684 TITLE TRIPOD MOUNT ASSY SCALE NTS <small>COPYRIGHT © 2003 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD</small>	
DRAWN	RF		
CHECKED	RF		
MFG. APPR.	RF		
APPROVED	RF		
DE APPR.	RF	REV. D SHEET 1 OF 5 DATE 10.03.03	

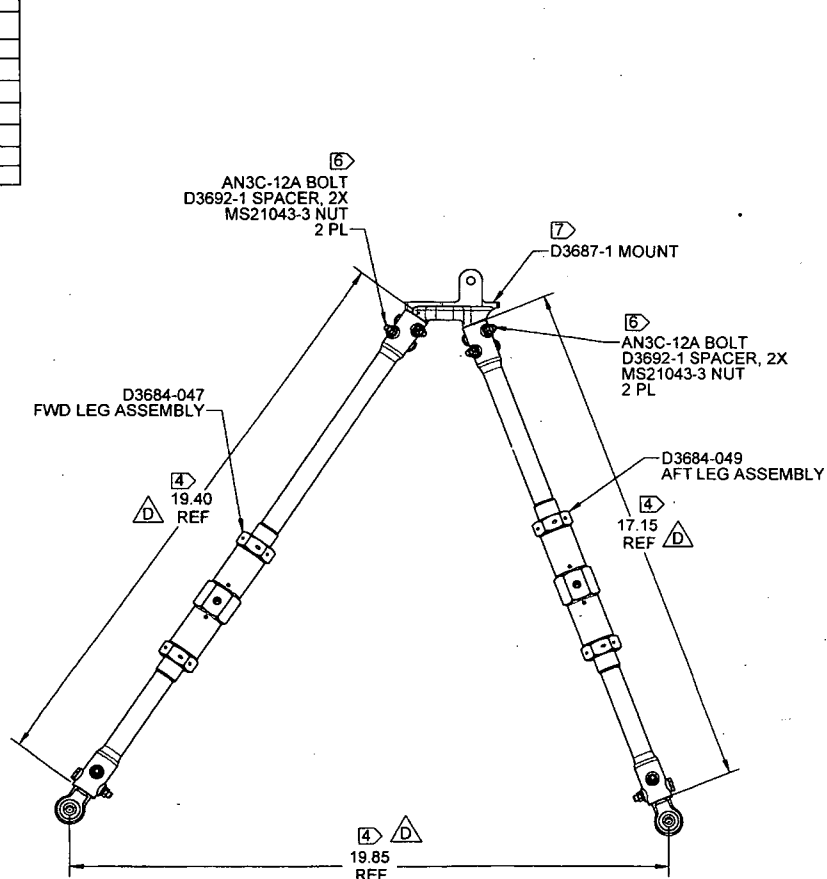

ITEM	QTY -043	PART NUMBER	DESCRIPTION
1	X	D3684-043	MOUNT ASSEMBLY
2	1	D3687-1	MOUNT
3	1	D3684-047	FWD LEG ASSY
4	1	D3684-049	AFT LEG ASSY
5	8	D3692-1	SPACER
6	4	AN3C-12A	BOLT
7	4	MS21043-3	NUT



D3684-043 MOUNT ASSEMBLY


NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-043 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/-3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 6.6 lbs
- 6) TORQUE FASTENERS TO 20-25 in-lbs
- 7) ASSEMBLE D3684-047 & D3684-049 WITH D3687-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		D3684	SHEET 2 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	COPYRIGHT © 2008 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD			

RELEASED
2010-03-15

ITEM	QTY -045	PART NUMBER	DESCRIPTION
1	X	D3684-045	INBOARD LEG ASSEMBLY
2	1	D3688-5	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

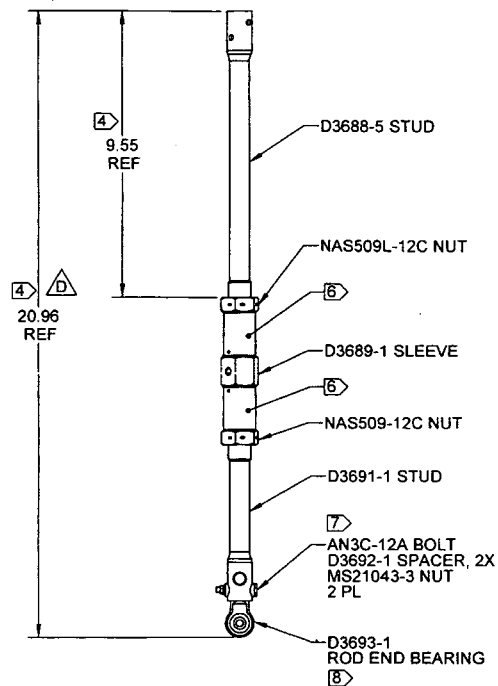

D3684-045 INBOARD LEG ASSEMBLY


NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-045 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSION SHOWN IS WHEN D3688-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.1 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

RELEASED
2010-03-15

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		D3684	SHEET 3 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

ITEM	QTY -047	PART NUMBER	DESCRIPTION
1	X	D3684-047	FWD LEG ASSEMBLY
2	1	D3688-1	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

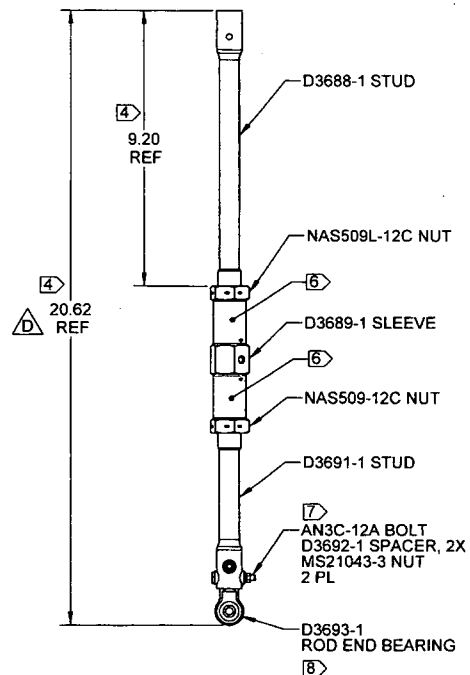

D3684-047 FWD LEG ASSEMBLY


NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-1 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.09 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		D3684	SHEET 4 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	<small>COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

RELEASED
2010-03-15

ITEM	QTY -049	PART NUMBER	DESCRIPTION
1	X	D3684-049	AFT LEG ASSEMBLY
2	1	D3688-3	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

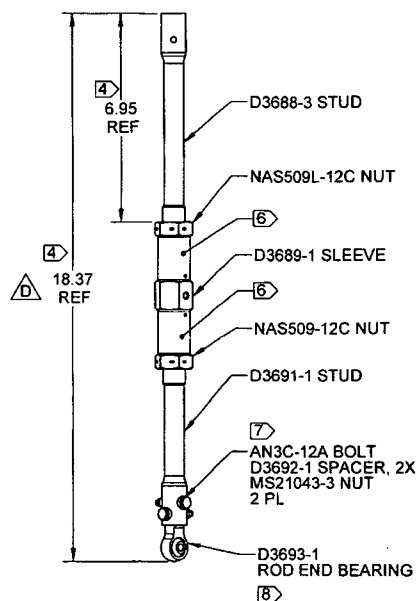





D3684-049 AFT LEG ASSEMBLY

RELEASED
2010-03-15

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 2.86 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		D3684	SHEET 5 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	COPYRIGHT © 2008 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD			